


Split pitched vent

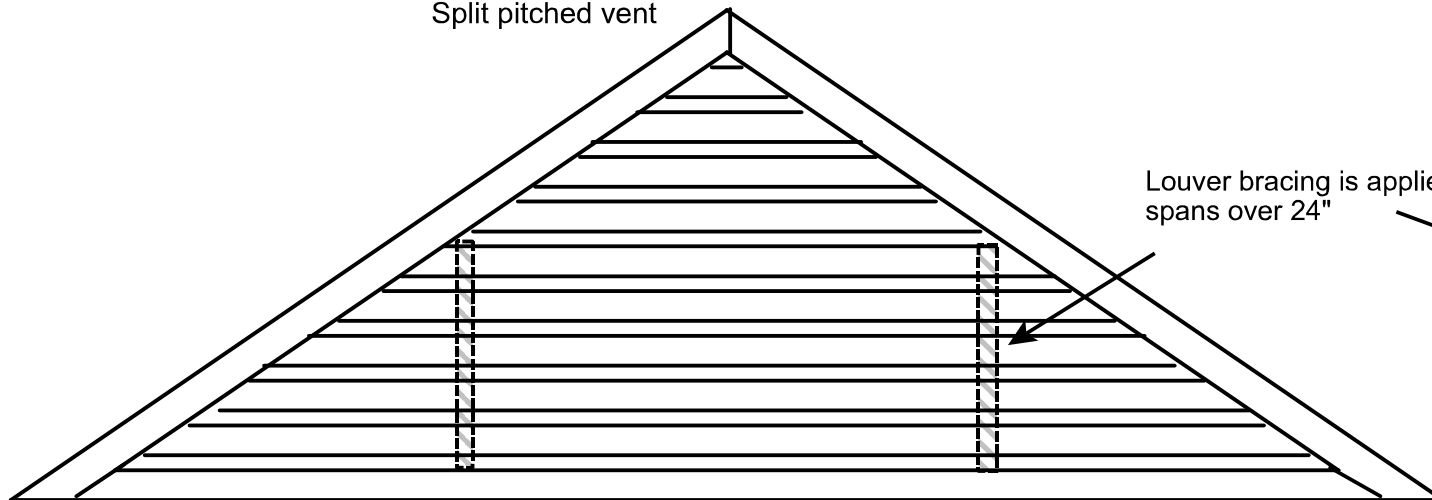

Pitched Gable Vent
Typical Construction

Louver bracing is applied to spans over 24"

Joints are mitred and glued. Aluminum screen wire for insect shield.

Louvers are $\frac{3}{4}$ " thick by $3\frac{5}{8}$ " wide and set a 30 deg and spaced 3"

Box frame is $\frac{3}{4}$ " thick by $2\frac{3}{4}$ " deep.

Face trim is applied to the face of the vent box.

$2\frac{3}{4}$ (SE) Square Edge is $\frac{3}{4}$ " by $2\frac{3}{4}$ " wide and overhangs the edge by 2" on all sides.

2" (BM) Brick Molding is $1\frac{1}{8}$ " by 2" wide and overhangs the edge by $1\frac{1}{8}$ " on all sides.

Louver bracing is applied to the back side of the the louvers.

